

MORELLO

MATERIAL HANDLING TECHNOLOGY SINCE 1946

MODEL SGAI VSF R 8/2



8 tons capacity



Battery powered



4,5 km autonomy



Command by remote controller



Turning radius 2450 mm



Loading deck 2000 x 1000 mm







Suitable for concrete and asphalt floor



CARPLY® plywood deck covering

SGAI VSF R 8/2

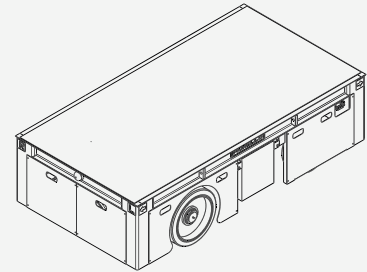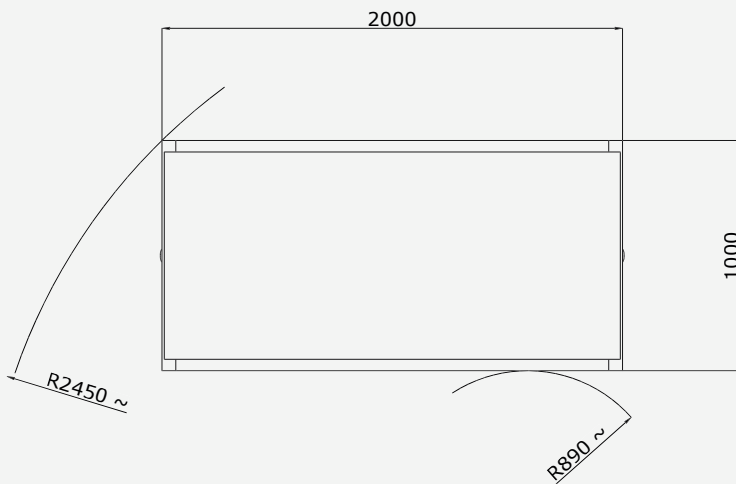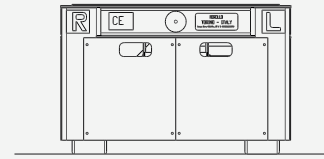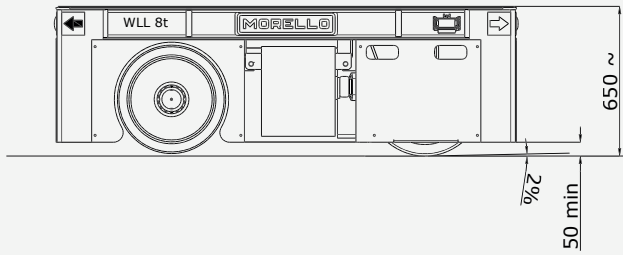

TECHNICAL DATA

WORKING LOAD LIMIT	8 t distributed
LOADING DECK LENGTH	2000 mm
LOADING DECK WIDTH	1000 mm
LOADING DECK HEIGHT	650 mm
WHEELS NUMBER	4 (2 driven)
KIND OF WHEELS	Solid rubber – suitable for concrete and asphalt levelled floor
CONTROL	Wired controller + Radio controller
LIFTING DECK	No
CLIMBING ABILITY	2%
SPEED	Up to 25 m/min with full load
BATTERY	Lead-acid (lithium as option)
BATTERY AUTONOMY	4,5 km approx. (on flat floor, 50% with full load and 50% without load)