

MORELLO

MATERIAL HANDLING TECHNOLOGY SINCE 1946

MODEL SGAE OMNI-D R 20/2



20 tons capacity



Omnidirectional steering



Battery powered



4,5 km autonomy



Command by remote controller



All wheels driven



Touch LCD diagnostic screen



Loading deck 4000 x 2200 mm







Suitable for concrete
and asphalt floor



Liftable loading deck
(as option)

SGAE OMNI-D R 20/2

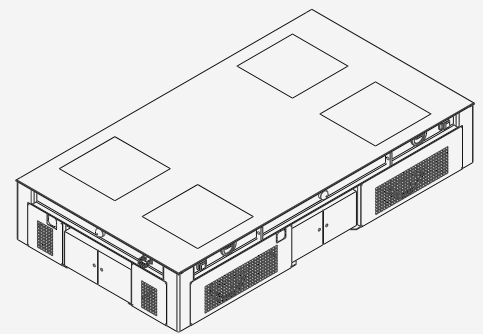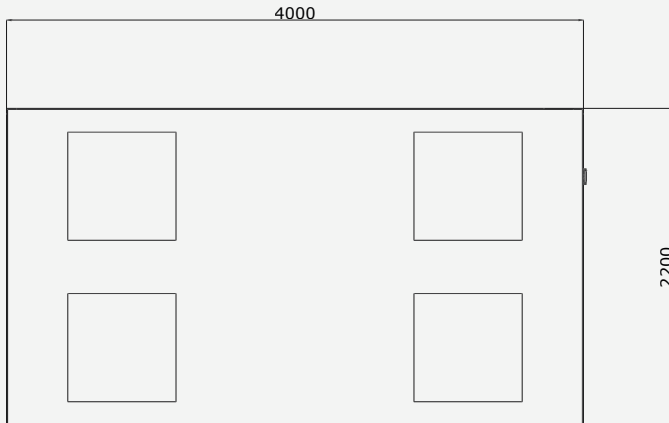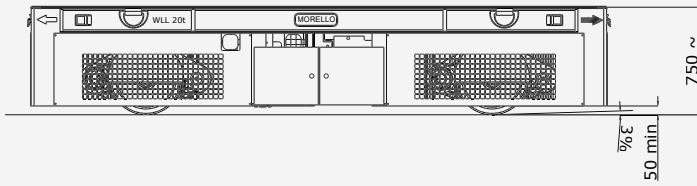

TECHNICAL DATA

WORKING LOAD LIMIT	20 t distributed
LOADING DECK LENGTH	4000 mm
LOADING DECK WIDTH	2200 mm
LOADING DECK HEIGHT	750 mm
WHEELS NUMBER	8 (all driven)
KIND OF WHEELS	Solid rubber - suitable for concrete and asphalt levelled floor
CONTROL	Radio controller
LIFTING DECK	As option - lifting stroke 150 mm
CLIMBING ABILITY	3%
SPEED	Up to 25 m/min with full load
BATTERY	Lead-acid (lithium as option)
BATTERY AUTONOMY	4,5 km approx (on flat floor, 50% with full load and 50% without load)

MORELLO GIOVANNI S.r.l.
L.go Dora Colletta 85/A
10153 Torino (Italy)

+39 (0)11/2480569
info@morellogiovanni.it
www.morellogiovanni.it

MORELLO
MATERIAL HANDLING TECHNOLOGY SINCE 1946