

MORELLO

MATERIAL HANDLING TECHNOLOGY SINCE 1946

MODEL SGAE $\pm 90^\circ$ P 25/2



25 tons capacity



Battery powered



5 km autonomy



Command by remote controller



Turning radius 2473 mm



LCD diagnostic screen



Loading deck 3000 x 1600 mm







Suitable for concrete floor



Checker steel plate deck covering

SGAE ±90° P 25/2

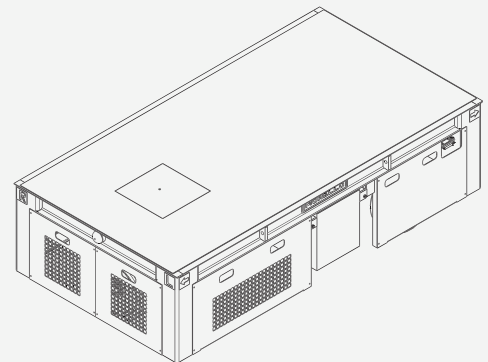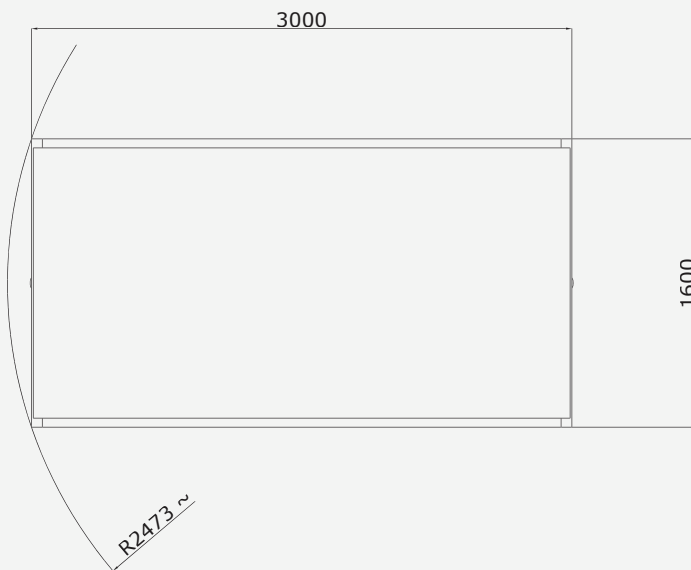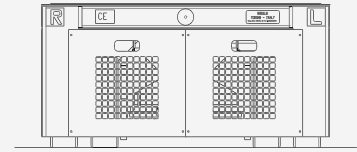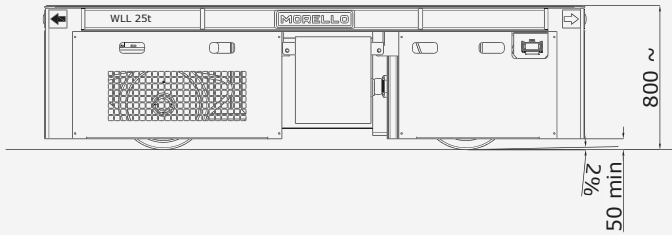

TECHNICAL DATA

WORKING LOAD LIMIT	25 t distributed
LOADING DECK LENGTH	3000 mm
LOADING DECK WIDTH	1600 mm
LOADING DECK HEIGHT	800 mm
WHEELS NUMBER	4 (2 driven)
KIND OF WHEELS	Polyurethane – suitable for concrete levelled floor
CONTROL	Wired controller + Radio controller
LIFTING DECK	No
CLIMBING ABILITY	2%
SPEED	Up to 30 m/min with full load
BATTERY	Lead-acid (lithium as option)
BATTERY AUTONOMY	5 km approx. (on flat floor, 50% with full load and 50% without load)

MORELLO GIOVANNI S.r.l.
L.go Dora Colletta 85/A
10153 Turin (Italy)

+39 (0)11/2480569
info@morellogiovanni.it
www.morellogiovanni.it

MORELLO
MATERIAL HANDLING TECHNOLOGY SINCE 1946